

CX-UHF5-ML-A

350010-T

Marine and Land Based UHF Antenna. Tx/Rx. 250W
5 dBd. N-female. N275F. Packed in a tube.

This omnidirectional 5 dBd gain antenna is used for radio telephone systems, two-way business radios and many other UHF applications. The antenna is manufactured in premium quality materials in order to prevent galvanic corrosion. Radiating elements are made of copper. The antenna is manufactured using crimping technology giving the antenna a 4-5 times stronger build-up. The antenna fits the included mount N275F directly. The antenna is subject for improvement at all times. The antenna has the same rugged design as all other AC Antennas products thus it withstands harsh environmental conditions, both on sea and land.

Short description


Product group	UHF
Design	Collinear coaxial dipole
Pattern	Omnidirectional


Electrical specifications

Frequency range [MHz]	A: 420.0-450.0 B: 420.0-455.0 C: 415.0-455.0
Bandwidth [MHz]	A: 30 B: 35 C: 40
Nominal Impedance [Ohm]	50
Max. Input Power [Watt]	250
Gain [dBd/dBi/Marine dB]	5 / 7.15 / 10
VSWR	A: <1.5:1 B: <2.0:1 C: <2.5:1
Polarisation	Vertical
DC Shorted	Yes
DC Grounded	Yes
Connector	N-Female

Mechanical specifications

Length [m/ft]	2.17 / 7.12
Sections	1
Weight [kg/lbs]	2.10 / 4.63
Survival Wind Speed [km/h / m/s / mph]	160 / 45 / 99
Wind Area [m2/ft2]	0.0455 / 0.4898
Wind Load @ 160km/h [N]	66
Material	Fibreglass
Colour	White
Operating Temperature Range [°C/°F]	-55 to +70 / -67 to +158
Ingress Protection	IP68
Thread	1" 14TPI male / -
Mounting	Mount N275F included



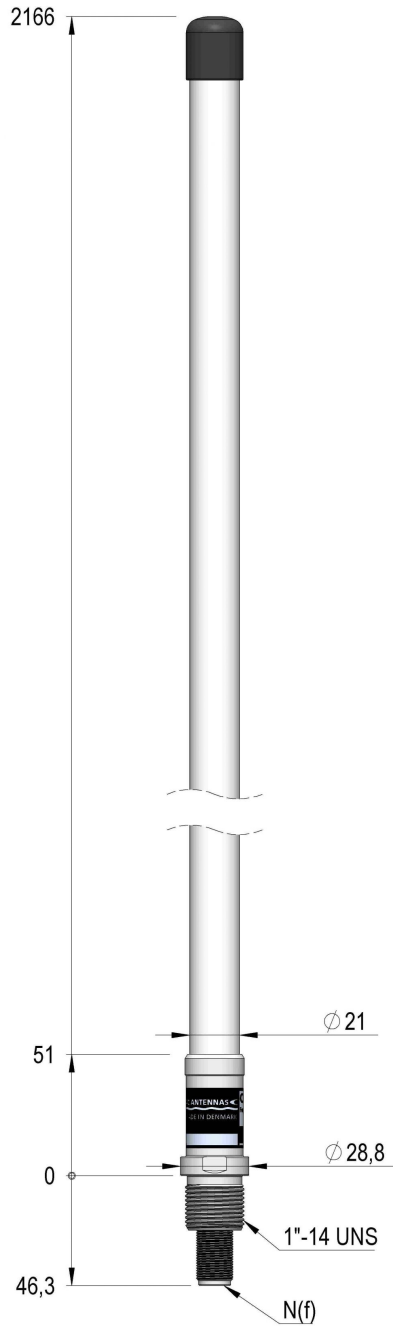

AC Antennas A/S | Fabriksparken 40, DK-2600 Glostrup, Denmark
 Phone: +45 4581 0413 | acantennas@acantennas.com | www.acantennas.com

AC ANTENNAS
 WE CONNECT THE WORLD

Specifications subject to change without further notice. The information in this document does not form part of any quotation or contract

Aug 1, 2024 – Page 2